

RUTX12

DUAL LTE CAT6 INDUSTRIAL CELLULAR ROUTER



RUTX12 360° VIEW



WIFI & BT

Wave-2 802.11ac Dual Band WIFI and Bluetooth LE

DUAL SIM

Instant failover switching

BONDING

Effectively combines multiple Internet sources into one

RMS

Compatible with Teltonika Remote Management System

DUAL LTE

Cellular speeds up to 600Mbps with dual simultaneous LTE CAT 6 connections

GNSS

Global Navigation Satellite System for location services and time synchronization


RUTX12

PRODUCT DESCRIPTION


- // RUTX12 is the most powerful Dual LTE Cat 6 router in our portfolio.
- // Two simultaneously operational LTE Cat 6 modems provide speeds up to 600 Mbps with load balancing feature.
- // The bonding functionality effectively combines multiple internet sources into one for a seamless data transfer.
- // 5 x Gigabit Ethernet ports, Wave-2 802.11ac Dual-Band Wi-Fi, Bluetooth LE, and USB interfaces and dual SIM make this device irreplaceable in applications where losing connection is not an option.
- // Packed with advanced security features like VPN, IPsec, PPTP, L2TP Stunnel and GNSS tracking.



FRONT VIEW

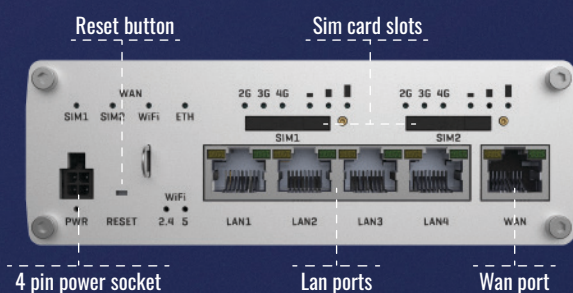

BACK VIEW

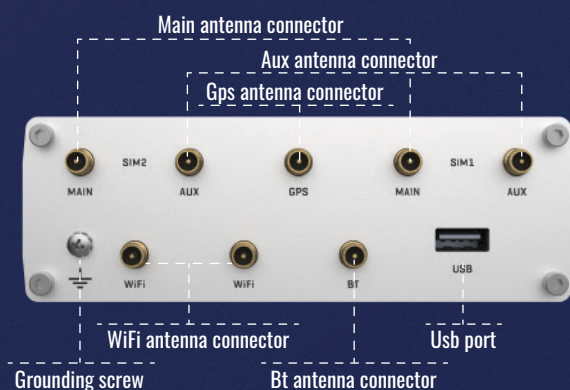

KEY FEATURES

HARDWARE

Mobile	2 X 4G/LTE (Cat 6), 3G
CPU	Qualcomm, 4 x ARM Cortex A7, 717 MHz
Memory	256 MBytes Flash, 256 MBytes RAM
Powering option	4pin power socket, 9-50 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	4 x SMA for mobile, 2 x RP-SMA for WiFi, 1 x RP-SMA for Bluetooth, 1 x SMA for GPS
Ethernet	5 x 10/100/1000 Ethernet ports: 1 x WAN (configurable as LAN), 4 x LAN
WiFi	IEEE 802.11b/g/n 2.4GHz, IEEE 802.11ac/n/a 5GHz, Access point (AP), Station (STA)
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Connectors	1 x 4 pin DC, 5 x Ethernet, 4 x SMA for LTE, 2 x WiFi RP-SMA, 1 x SMA for GNSS, 1 x RP-SMA for Bluetooth
Bluetooth	4.0 (Low energy)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Other	1 x USB host
Status LEDs	4 x WAN type, 6 x Connection type, 6 x Signal strength, 2 x WiFi, 10 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option and grounding capability
Dimensions (W x H x D)	132 x 44 x 95 mm
Weight	540 g

SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Multiple PDN, Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, EIGRP, NHRP), Routing rules
Monitoring and management	WEB UI, CLI, SSH, SMS, TR-069, SNMP, JSON-RPC, MQTT, RMS
Cloud solutions	RMS, FOTA, Telenor, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
Supported Hotspot platforms	IronWiFi, HotspotSystem, Cloud4Wi, SAI + WiFi, MugiCloud, Purple.ai

RMS

RMS | REMOTE MANAGEMENT SYSTEM
COMPATIBLE WITH RUTX12
 MANAGEMENT | ALERTS | CONFIGURATION | ACCESS | FOTA



SOCIAL

