

TETRA UHF

Bumper Mount Antenna

01/04/2016 v2

BMP1-S1

- Covert application
- Robust overmoulded design
- Fits behind vehicle bumper



The Panorama Bumper Mount Antenna is designed for covert operations and other applications which require a vehicle antenna that is effectively invisible.


Mounted in the vehicle's bumper, installation requires no drilling and is invisible from the outside of the car.



Typical antenna positioning

Technical Drawing


BMP1-S1-5B Shown

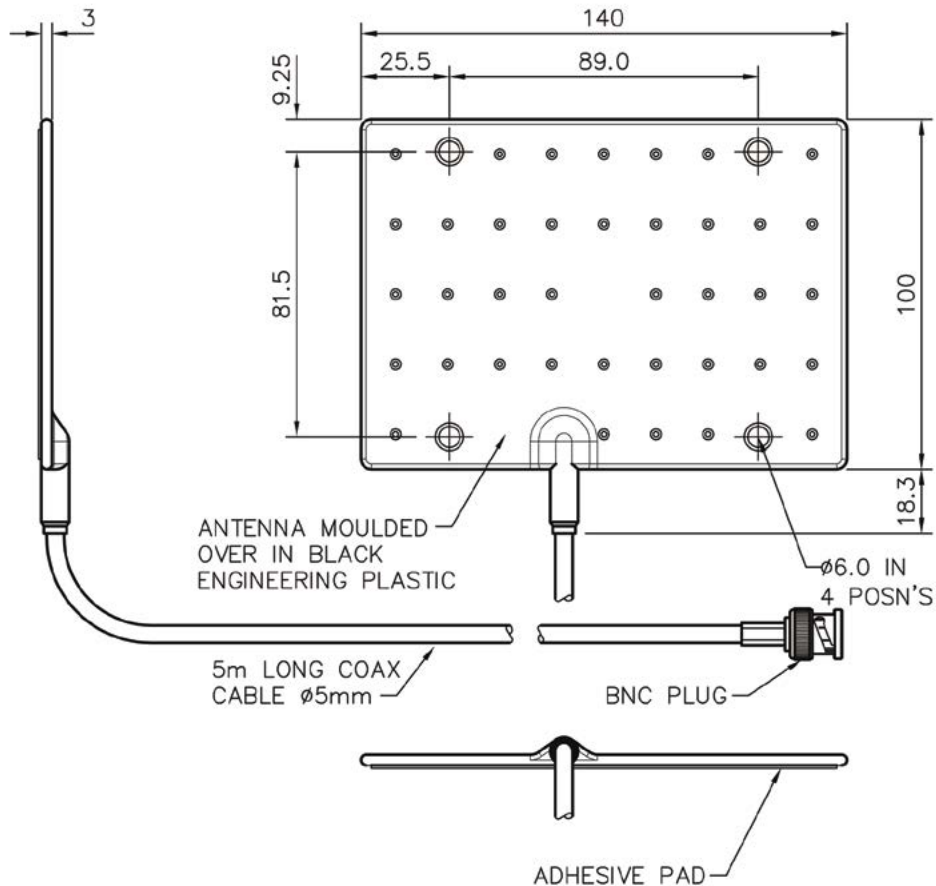


TETRA UHF

Bumper Mount Antenna


Typical E-Plane* (390MHz)



Typical H-Plane* (390MHz)



Typical VSWR*

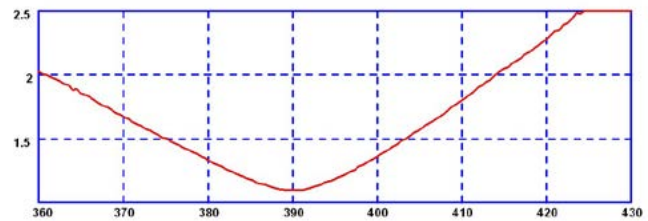

*E+H plane patterns shown measured in free space

*VSWR shown installed with 5m (17') of CS23 cable

Part No.		BMP1-S1
Electrical Data		
Frequency Range (MHz)	380-400	
Operational Band	S1	
Peak Gain: Isotropic (in free space)	0dBi	
Compared to ¼ wave	-2dB	
VSWR	≤ 2.5:1	
Polarisation	Vertical	
Pattern	Omni-directional	
Impedance	50Ω	
Max Input Power (W)	25	
Mechanical Data		
Dimensions (mm)	Length	140 (5.51")
	Width	100 (3.9")
	Depth	4 (including adhesive pad) (0.15")
Operating Temp (°C)	-40° / +80°C (-40° / +176° F)	
Material	TPE	
Colour	Black	
Mounting Data		
Fixing	Adhesive pad & 4 × fixing holes	
Cable Data		
Type	CS23 (RG158 c/u)	
Diameter (mm)	5 (0.19")	
Length (m)	5 (16' 4")	
Termination	BNC Plug*	
*Connector Configurations		
BNC (fitted)	BMP1-S1-5B	
TNC (fitted)	BMP1-S1-5T	
FME (fitted)	BMP1-S1-5F	
Bare End	BMP1-S1-5	



Panorama Antennas Ltd
Frogmore, London, SW18 1HF, United Kingdom

T: +44 (0)20 8877 4444
F: +44 (0)20 8877 4477

E: sales@panorama-antennas.com
www.panorama-antennas.com

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice.

Copyright © Panorama Antennas Ltd. All rights reserved.