

OMNI-702














ANTENNAS | OMNI-702 SERIES

OMNI-DIRECTIONAL WI-FI ANTENNA

2400 – 2500 MHz, 8 dBi



 2400 – 2500 MHz	 8 dBi	 Increase x Mb/s	 Omni- Directional	 2.4 – 2.5 GHz	 Internet of Things
 Machine to Machine	 -40°C to +80°C	 Fire Resistant	 IP 69K	 IK 10	

- High gain, omni-directional Wi-Fi antenna
- Suitable for 2.4 GHz Wi-Fi deployment
- Compliant with IEEE 802.11b/g wireless standard
- Ideal for IoT and M2M applications
- Highly rugged and vandal resistant design
- High pressure water and dust ingress protected enclosure (IP69K)



APPLICATION AREAS

Product Overview

The OMNI-702 antenna is an omni-directional Wi-Fi antenna, developed by Poynting Antennas. The antenna operates from 2.4 – 2.5 GHz, covering the 2.4 GHz Wi-Fi band, and has a maximum gain of 8 dBi. The constant gain throughout the entire band offers improved performance with reliable connections. The antenna was designed for superior pattern control over the entire frequency range, making the OMNI-702 an exceptional omni-directional antenna for its size. The antenna can connect to any Wi-Fi access point and resolve channel saturation and provide ultimate Wi-Fi performance and flexibility. The rugged enclosure design offers protection in adverse environmental conditions with an IP 69K and IK 10 rating. The antenna has an N-Type female connector at its base, which can be connected to a cable of the desired type and length.

Features

- High performance omni-directional antenna
- High gain Wi-Fi antenna from 2400 to 2500 MHz
- Easy installation, pole- or wall mountable
- Stylish and robust design
- High pressure water and dust proof enclosure (IP 69K)


Application Areas

- Smart Utilities: Smart Power Metering, Gas & Water Metering
- Smart Buildings: Climate control, access control, security, irrigation
- Smart Environmental & Water Systems
- Warehouses & Logistics systems
- Industrial factory automation and M2M systems
- Farming & Agricultural M2M IoT



Frequency Bands

The OMNI-702 is an omni-directional antenna that works from 2400 – 2500 MHz

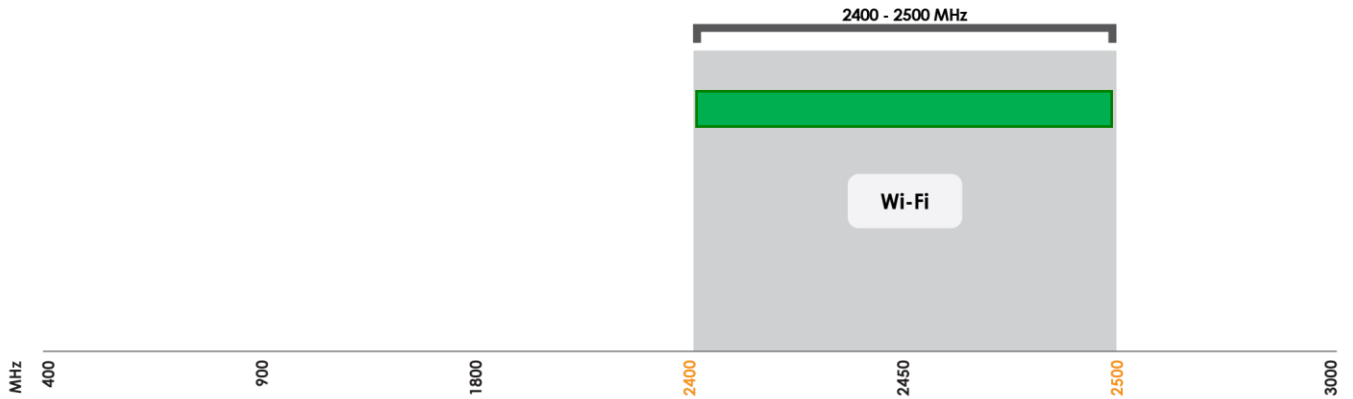

 Indicates the WI-FI bands on which OMNI-702 works

Antenna Overview

	
Ports	1
SISO / MIMO	SISO
Frequency Bands	2400 – 2500 MHz
Polarisation	Linear (Vertical)
Peak Gain	8 dBi
Coax Cable Type	N/A
Coax Cable Length	N/A
Connector Type	N-Type (F)

Electrical Specifications

Frequency bands:	2400 – 2500 MHz
Gain (peak):	8 dBi
VSWR:	<1.5:1
Feed power handling:	10 W
Input impedance:	50 Ohm (nominal)
Polarisation:	Linear Vertical
DC short:	Yes

Product Box Contents

Antenna:	A-OMNI-0702
Mounting bracket:	Included L-Bracket and adhesive disc

Ordering Information

Commercial name:	OMNI-0702
Order product code:	A-OMNI-0702-V1-01
EAN number:	6009710921999

Mechanical Specifications


Product dimensions	306 mm x Ø70 mm
Packaged dimensions:	386 mm x 80 mm x 96 mm
Weight:	0.25 kg
Packaged weight:	0.555 kg
Radome material:	UV Stable ASA
Radome colour:	Grey Pantone 429C
Mounting Type:	Pole, wall and surface mount

Environmental Specifications, Certification & Approvals


Wind Survival:	<190 km/h
Temperature Range (Operating):	-40°C to +80°C
Environmental Conditions:	Outdoor/Indoor
Water ingress protection ratio/standard:	IP 69K
Salt Spray:	MIL-STD 810G/ASTM B117
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non-condensing
Storage Temperature:	-40°C to +80°C
Enclosure Flammability Rating:	UL 94-HB
Impact resistance:	IK 10
Product Safety & Environmental:	Complies with CE and RoHS standards

Antenna Performance Plots

VSWR

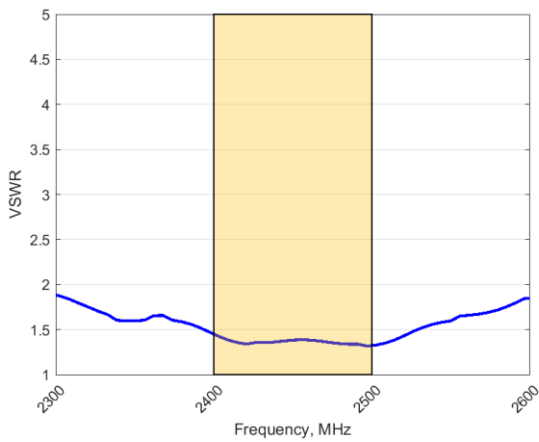

GAIN (EXCLUDING CABLE LOSS)

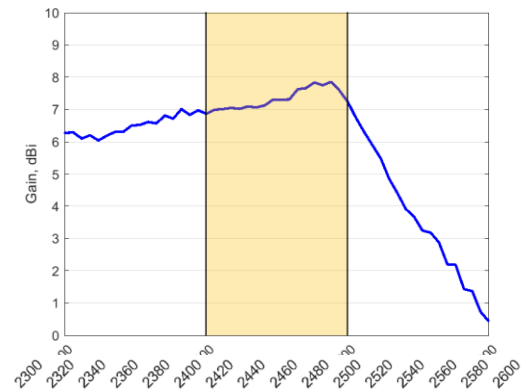

Voltage Standing Wave Ratio (VSWR)*

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The OMNI-702 delivers superior performance across all bands with a VSWR of 1.5:1 or better across the band.

* VSWR measured with no cable

Gain* in dBi


8 dBi is the peak gain across all bands from 2400 – 2500 MHz

Gain @ 2400 – 2500 MHz:

8 dBi

*Antenna gain measured with polarisation aligned standard antenna



Technical Drawings

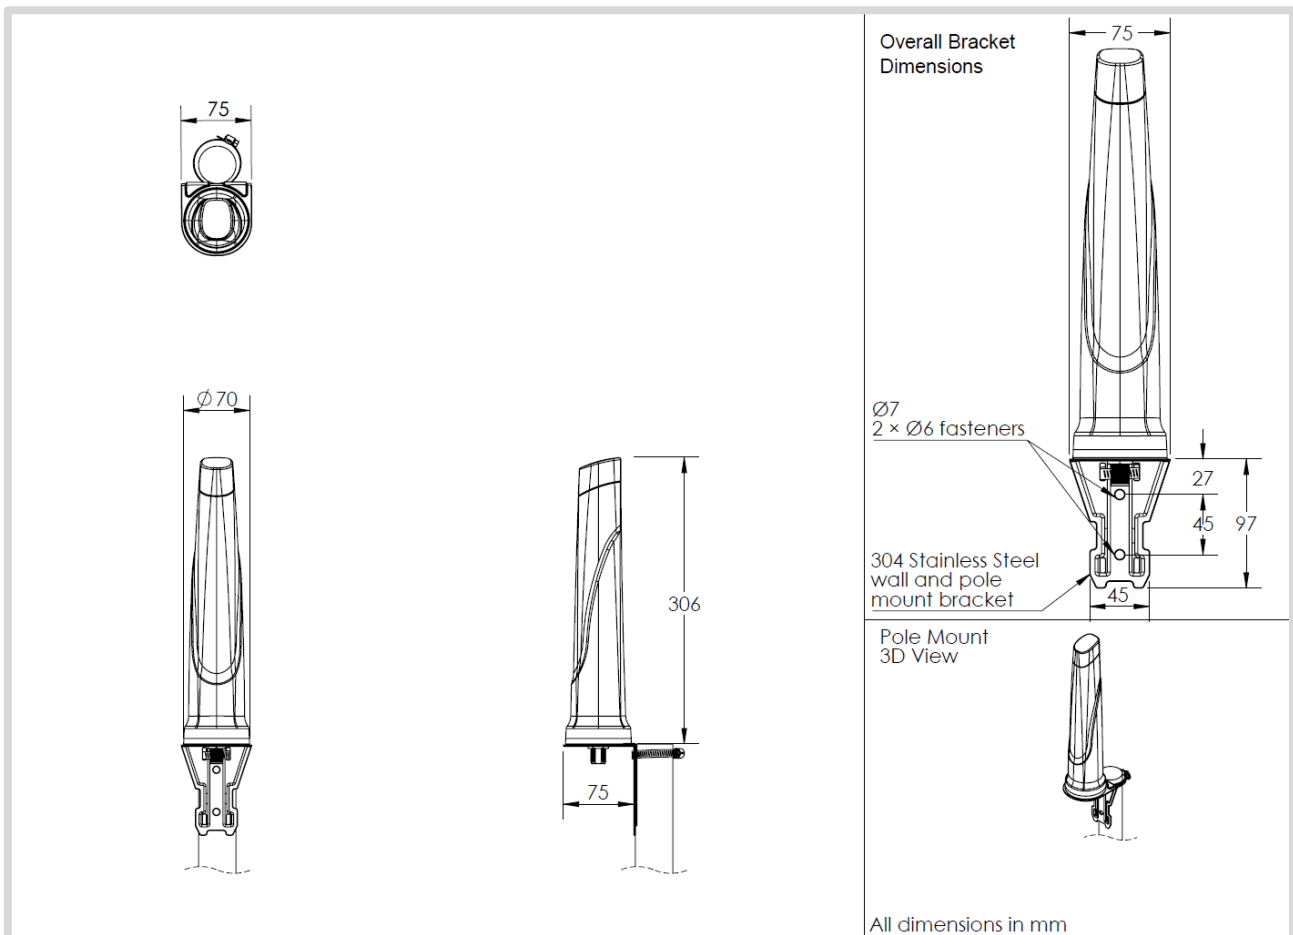


Radiation Patterns

Azimuth: 2400 – 2500 MHz

Elevation: 2400 – 2500 MHz

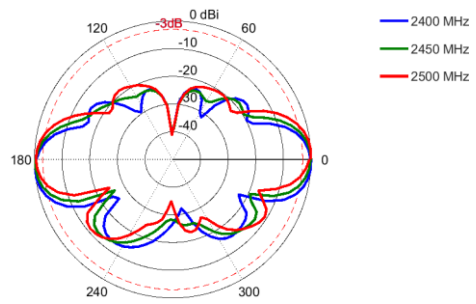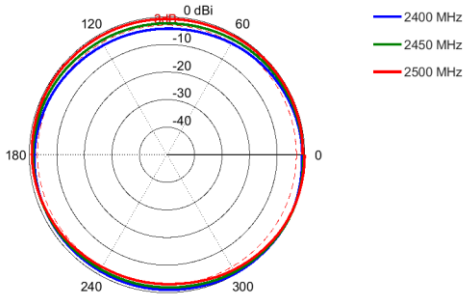


Mounting Options

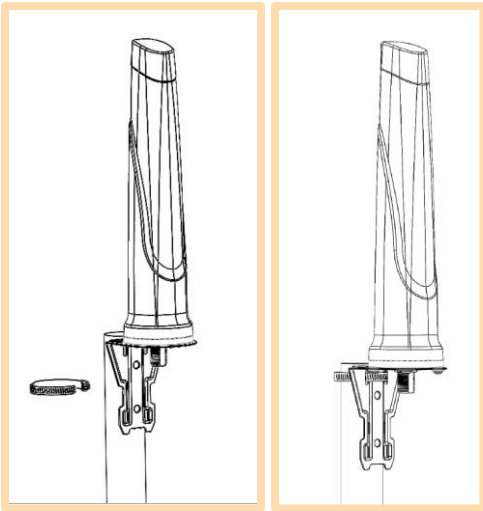


Pole Mount

Pole mounted using included L-Bracket and cable clamp

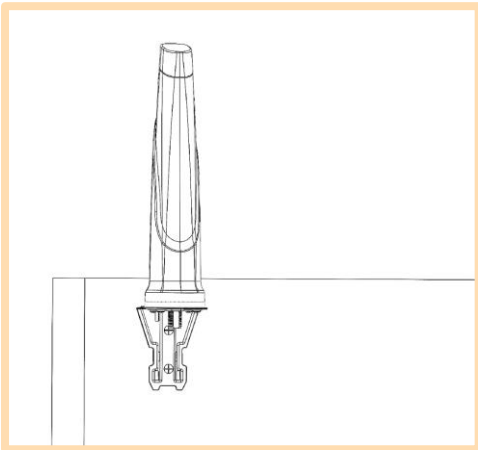

Wall Mount

Wall/Cabinet mounted using included L-Bracket

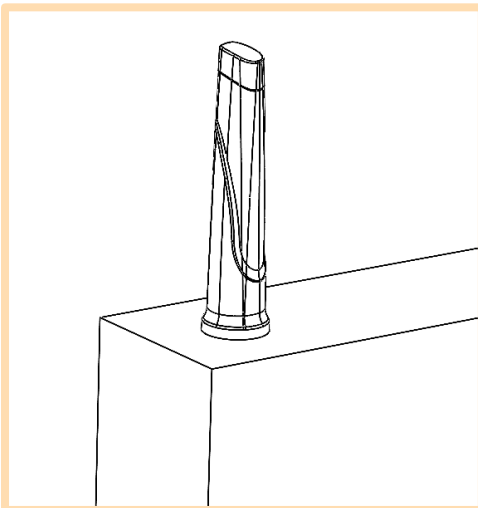

Surface Mount

Surface mounted using included adhesive disc

Optional Accessories

See accessories technical specifications on www.poynting.tech

Contact Poynting

Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park
Landmarks Avenue
Samrand, 0157
South Africa

Phone: +27 (0) 12 657 0050

E-mail: sales@poynting.co.za

Poynting Europe

Regus Business Center Neue Messe Riem
Kronstadter Straße 4
81677 München
Germany

Phone: +49 89 208026538

E-mail: sales-europe@poynting.tech

Poynting USA

1804 Owen Court, Suite 104
Mansfield
TX 76063
USA

Phone: +1 817 533-8130

E-mail: sales-us@poynting.tech