



## MCF-LW06VMC

### LoRaWAN® Vending Machine Supervisor

This device can remotely acquire the accounting data, as EVA-DTS file, from any vending machine.

It can be connected by DDCMP or DEX interface, as well as printer port for other devices.

This device can send alarms or triggered events to the cloud platform and manage price changes.



### Characteristics:

- CPU Cortex M4
- RTC
- EEPROM 32KB
- Flash 1MB
- Encryption AES 128 bit
- LiPo rechargeable battery
- Class A LoRaWAN® stack EU868, AS923, AU915, US915 EU868, AS923
- Serial interfaces: RS232, TTL
- Printer emulation
- USB On The Go
- IoT node setup and firmware upgrade via USB interface
- Energy harvesting enabled from RS232 data channels
- Optional external power supply 10-36Vdc
- Storage temperature range -20 + 80 °C
- Working temperature range -10 + 70 °C
- Dimensions L x H x P: 81 x 60 x 24mm


### Applications:

- Remote monitoring vending machines equipped with serial port
- Cost effective alternative to GPRS modems
- Remote prices change
- Mains blackout detection
- Temperature monitor via PTC
- Antitampering
- Other alarms available

# MCF-LW06VMC

## LoRaWAN® Vending Machine Supervisor

### Examples of MCF-LW06VMC setup for Vending application

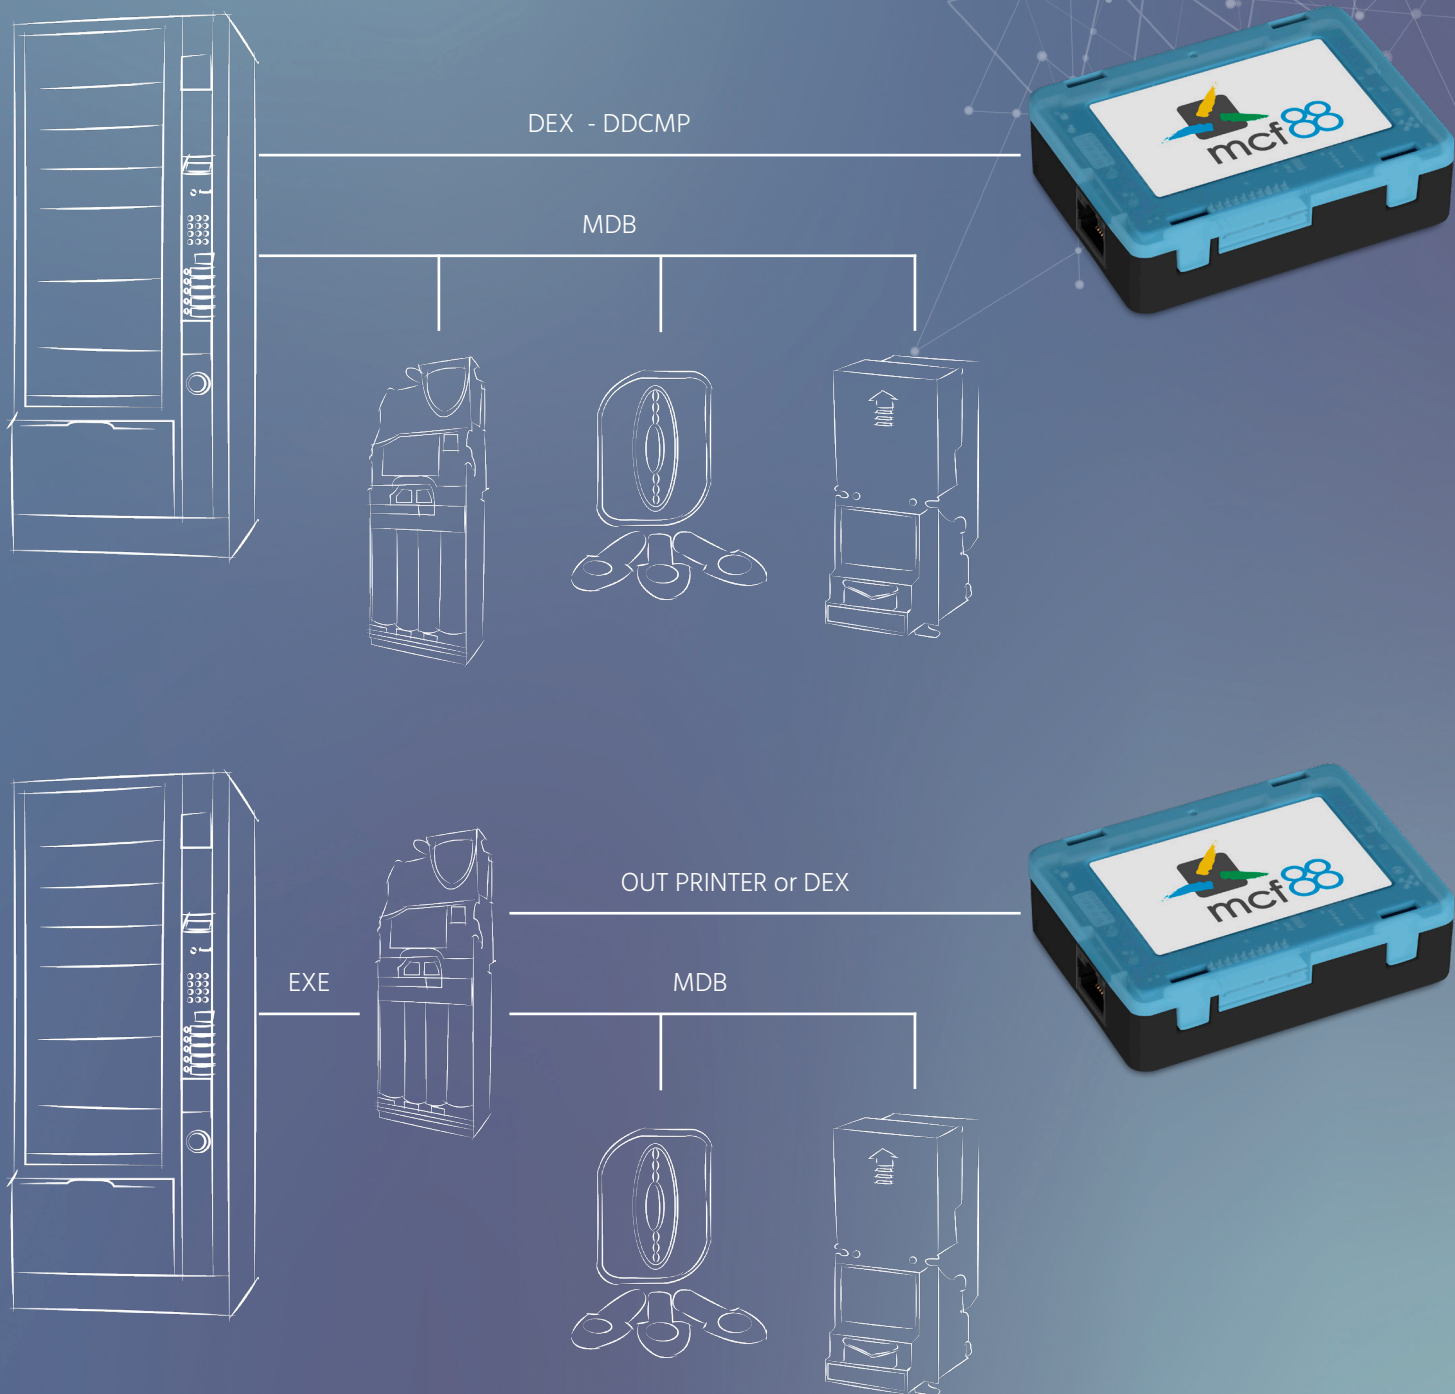




# MCF-LW06VMC

LoRaWAN® Vending Machine Supervisor

Infrastructure mcf88-LoRaWAN

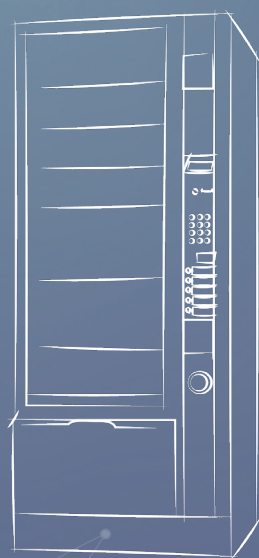

EVA DTS/PRINTER



On Air



Mcf88 Client Application



CLOUD8816 Management



Base Station LoRa

# MCF-LW06VMC

## LoRaWAN® Vending Machine Supervisor

The screenshot shows a web interface with a dark header containing 'Distributori' and 'File inviati'. Below the header is a table with two columns: 'DevEUI' and 'Descrizione'. The table contains two rows of data. Each row has a lightning bolt icon, a lock icon, a DevEUI value, a description input field, and three action icons (refresh, document, trash). At the bottom of the table area, there is a pagination control showing 'Visualizzati da 1 a 0 di 0' and '10 Elementi per pagina'. In the bottom right corner of the screenshot, the 'cloud8816 wanvend' logo is visible.

DevEUI	Descrizione
70B3D5[redacted]	test vending
70B3D5[redacted]	

A specific cable allows to connect to several vending machine on the market. Please refer to following table.

### Ordering code

- MCF-W49B
- MCF-W49C
- MCF-W49D
- MCF-W49E
- MCF-W49G
- MCF-W49H
- MCF-W49L

### Description

- LoRaWAN® CABLE FOR CASHFLOW
- LoRaWAN® CABLE FOR COGES ECS
- LoRaWAN® CABLE FOR COGES ENGINE
- LoRaWAN® CABLE FOR CURRENZA C2
- LoRaWAN® CABLE FOR MANEA VMC
- LoRaWAN® CABLE EVADTS JACK
- LoRaWAN® CABLE FOR FAS VMC